

PROJECT:

MODEL #:

ITEM #:

QTY:

AVAILABLE W/H:

APPROVAL:

## Sandwich Prep Tables

BLPT28-HC



BLPT36-HC



BLPT48-HC  
BLPT60-HC



BLPT72-HC



## STANDARD FEATURES

### Cabinet construction

- Stainless steel cabinet construction  
Stainless steel interior and exterior (galvanized steel back & bottom).
- Cyclopentane Insulation – Contains no hydro-fluorocarbons (HFCs) and is environmentally friendly
- Drop-in section:  
Fans force cold air into this enclosed area keeping stored food items consistently cold
- Insulated pan cover with a stainless steel divider which prevents food spillage into the storage area beneath
- Standard 1/6 / 4" food pans are provided.  
Unit accommodates 6" deep pans
- Epoxy coated wire shelves with adjustable shelving height.
- Side rail cutting board bracket with 9 1/2" deep, 1/2" thick cutting board included
- Four (4) 4" diameter swivel casters with front brakes standard.

### Refrigeration

- Hydrocarbon refrigerants (R-290) – increases energy efficiency by up to 25% compared to using HFC refrigerants. It is safer for the environment and does not cause ozone depletion.
- Self-contained system, rear mounted compressor.
- Electrodeposition coated evaporator increases performance by maintaining the heat transfer rates over the life of the evaporator and reducing potential corrosion.
- Innovative hot gas frame heating system reduces condensation and increases energy efficiency.
- Refrigerators have a temperature range between 33°F ~ 39°F

### Doors

- Self closing doors
- Durable door gasket with easy replacement.
- Lifetime guaranteed heavy duty all metal door handles. (Ni-Cr Plated)

### Design

- Self-diagnostic digital temperature control & monitor system  
Digital display allows for easy monitoring  
Digital controls include automatic evaporator fan motor delay.
- Rounded corner design gives a stylish appearance and reduces chances of injury.
- Visual and audible door open alarm, alarm sounds when doors are not completely closed to protect against food spoilage
- Standard NSF/ANSI Standard 7 compliant

### Connection

- 9 ft long flexible three wire cord with molded plug


### Optional Features & Accessories

- 2.5" diameter casters available
- 6" adjustable feet available
- Additional shelves are available.
- Drawer models available
- 6" pans available


# Sandwich Prep Tables

## PRODUCT PLAN VIEW

- Top View -

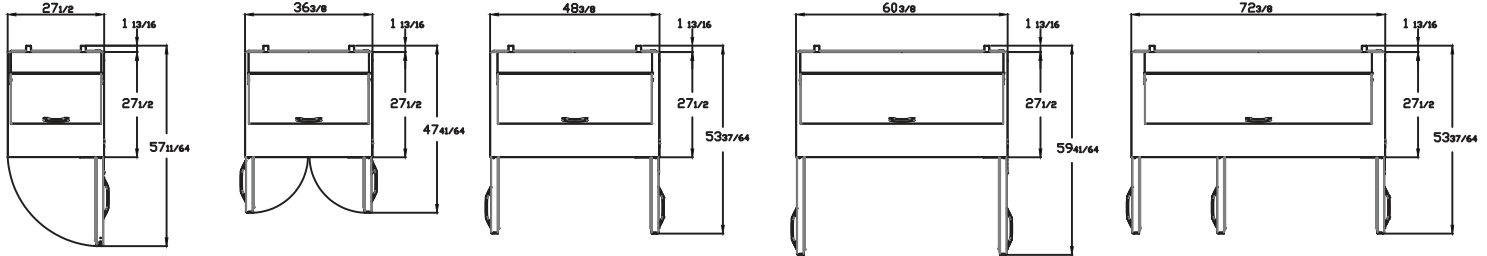

- Front View -

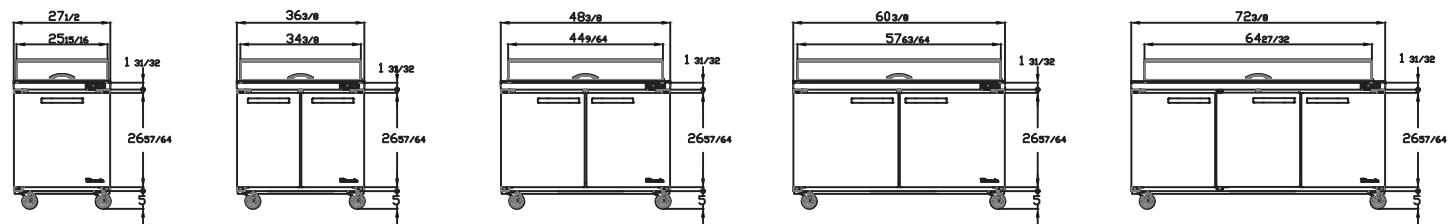

**BLPT28-HC**


**BLPT36-HC**

**BLPT48-HC**


**BLPT60-HC**

**BLPT72-HC**


Pan Configuration




**BLPT28-HC**




**BLPT36-HC**

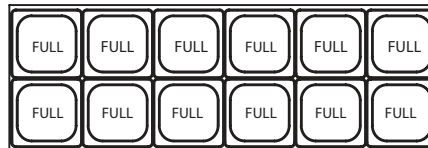

**BLPT48-HC**

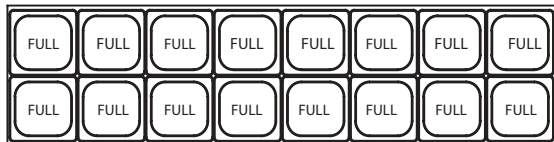


**BLPT60-HC**

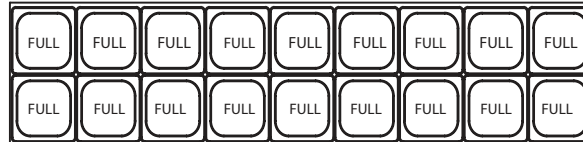

**BLPT72-HC**

- Side View -



## PRODUCT SPECIFICATION

Sandwich Prep Tables

Model	Product Description			Refrigerant		Temperature Range		Easy Maintenance			Cord Length (ft/m)	
	Sandwich Prep Table			R-290		33°F ~ 39°F		Sliding Condensing Unit			9.8ft (3m)	
	Doors	Capacity (Cu.Ft.)	Shelves	Cabinet Dimensions (inches / mm)			HP	Voltage	Amps	NEMA config.	Weight (lbs / kg)	
				L	D	H					Net Weight	Ship Weight
BLPT28-HC	1	7	1	27 1/2" (699mm)	33 1/32" (839mm)	42 1/2" (1082mm)	1/4+	115V / 60Hz	4.0	NEMA 5-15	157 (71)	203 (92)
BLPT36-HC	2	9.5	2	36 3/8" (923mm)	33 1/32" (839mm)	42 1/2" (1082mm)	1/4+	115V / 60Hz	4.1	NEMA 5-15	187 (85)	234 (106)
BLPT48-HC	2	13.1	2	48 3/8" (1227mm)	33 1/32" (839mm)	42 1/2" (1082mm)	1/4+	115V / 60Hz	4.5	NEMA 5-15	223 (101)	289 (131)
BLPT60-HC	2	16.7	2	60 3/8" (1533mm)	33 1/32" (839mm)	42 1/2" (1082mm)	1/4+	115V / 60Hz	4.7	NEMA 5-15	258 (117)	340 (154)
BLPT72-HC	3	20.2	3	72 3/8" (1839mm)	33 1/32" (839mm)	42 1/2" (1082mm)	1/4+	115V / 60Hz	5.3	NEMA 5-15	309 (140)	390 (177)

\*BLUE AIR has the right to change specifications without further notice.