
Insulated Pass Thru Proof/Hold Cabinet with Removable Supports

Perfect for carry-out and short term holding with a proofing option

Choose your hinging and door configuration

Shown with dutch door configuration - both control side and back side are clear on top and solid insulated on bottom

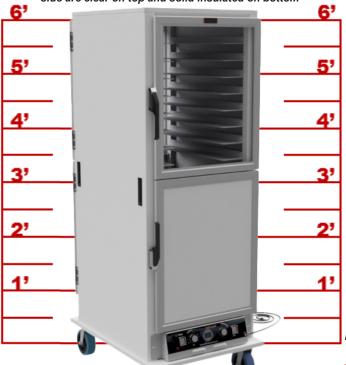


- All aluminum construction
- 3/4" concealed foam insulation provides additional energy efficiency and enhanced heat and moisture control
- Furnished with 16 pair of 5" removable pan supports to accommodate a wide range of pans and screens from 16 to 21" wide and up to 30" deep, including 18" x 26" trays and steam table pans
- Includes dual purpose HHP-SB-PT to use for proofing or holding
- Pan stop to provide uniform heat distribution throughout cabinet
- Will accommodate up to 16 pans on 3-1/4" center spacing
- Integrated side handles
- Ambient air temperature may affect heating performance
- Large Plate Series Casters 6" PU swivel, 2 w/brakes

Right Hinge Full doors or Dutch doors - clear or solid insulated

Left Hinae* Full doors or Dutch doors - clear or solid insulated

> Options: Bumpers Hasp lock Drip pan






Digital thermometer in face of heat unit Temp adjustable to approximately 180°F in Hold for insulated




Hold provides dry heat only while Proof provides lower temps with humidity





120 volt, 1700 watt 60 cycle. single phase 8-foot cord with NEMA 5-20P plug Dedicated 20 amp

Separate temperature and humidity controls

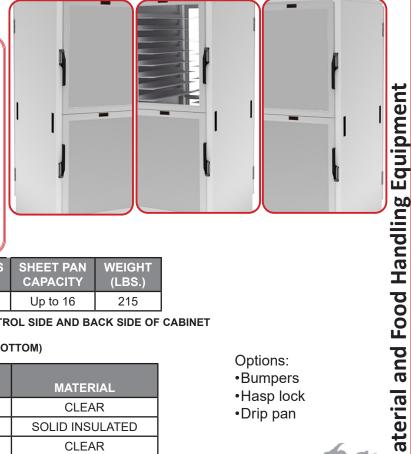

MODEL#	CENTER SPACING	OUTSIDE DIMENSIONS H x W x D (INCHES)		WEIGHT (LBS.)
CA74-PFIN-PT	3-1/4"	75-5/16 x 26-7/8 x 36	Up to 16	215

MUST CHOOSE YOUR DOOR CONFIGURATION FOR BOTH CONTROL SIDE AND BACK SIDE OF CABINET **FULL DOORS (CHOOSE 1 PER SIDE)**

DUTCH DOORS (CHOOSE 2 PER SIDE AND SPECIFY TOP AND BOTTOM)

Proudly Manufactured in Michigan





DOOR OPTIONS	SIZE	MATERIAL
DOOR-74-CD-MH-R	FULL	CLEAR
DOOR-74-ID-MH-R	FULL	SOLID INSULATED
DOOR-74-CDD-MH-R	DUTCH	CLEAR
DOOR-74-IDD-MH-R	DUTCH	SOLID INSULATED

(-R) Right hinge is standard, indicate -L for left hinge. *Left hinge are non-returnable.