



Item: _____
 Quantity: _____
 Project: _____

Delux Series

Models: ☐ RDR-4 ☐ RDR-2G12 ☐ RDR-G24 ☐ RDR-4SU ☐ RR-2GT12 ☐ RR-GT24



RDR-2G12

Gas Type: ☐ Natural ☐ LP

Elevation (if above 2000 ft.): _____

Standard Features

- Fully welded frame with lifetime warranty
- All stainless steel burner box
- 1,200°F mineral wool insulation
- Stainless steel drip tray/grease can
- Accommodates 18" x 26" full sheet pan
- Stainless steel front, sides, valve cover and kick plate including backguard and high shelf
- Stainless Steel oven "U" burner rated at 27,000 BTU/hr
- Oven pilot with 100% safety shut down
- Two piece, heavy duty lift off cast iron burner heads rated at 30,000 BTU/hr each
- 12" x 12" cast iron top grates with pilot shield
- Five position heavy gauge chrome rack guides
- One chrome rack per oven
- Five surface porcelain oven interior
- Stainless steel tubing for burners and pilots
- 3/4" thick polished steel griddle plate
- GT Griddle Series - standard with one thermostat per two burners
- SU - step up rear burners


Options and Accessories

- ☐ 6" high S/S stub back in lieu of high shelf
- ☐ 1" thick griddle plate
- ☐ Griddle on right (Left hand side standard)
- ☐ Chrome griddle plate
- ☐ Grooved griddle (specify width: _____")
- ☐ One thermostat per burner (GT Griddle Series)
- ☐ 12" hot top section - add suffix "-HT"
- ☐ 9" deep S/S landing ledge, with or without sauce pan cutouts
- ☐ Additional oven racks
- ☐ Open storage cabinet base - add suffix "-XB"
- ☐ Cabinet doors
- ☐ Intermediate shelf
- ☐ Wok burner head with 10" diameter S/S ring
- ☐ 48" quick disconnect and restraining cable
- ☐ 5" swivel casters (set of four - 2 locking)



2 YEAR LIMITED, PARTS AND LABOR WARRANTY

24" Gas Restaurant Range

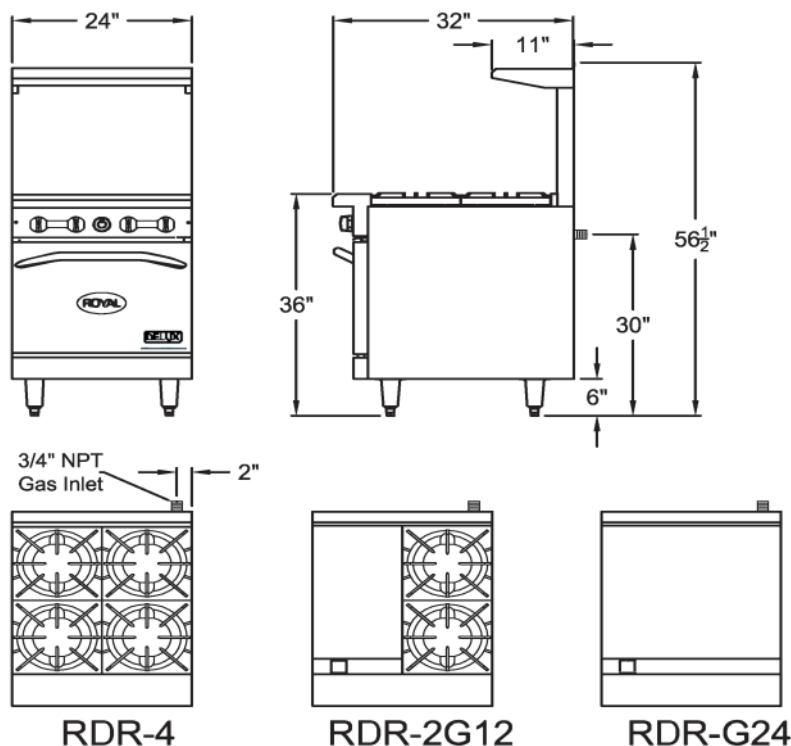

| Model Number | Open Burners | Griddle Burners | Total BTU | Ship Weight |
|--------------|--------------|-----------------|-----------|-------------|
| RDR-4 | 4 | 0 | 147,000 | 400 lbs. |
| RDR-2G(T)12 | 2 | 1 | 107,000 | 420 lbs. |
| RDR-G(T)24 | 0 | 2 | 67,000 | 440 lbs. |
| RDR-4SU | 4 | 0 | 147,000 | 410 lbs. |

Notes:

- For no oven (storage base) add suffix "-XB" and deduct 27,000 BTUs.
- Open burners at 30,000 BTU/hr each.
- Griddle Burners: 1 per 12" at 20,000 BTU/hr each.
- Oven burners at 27,000 BTU/hr.

Gas Connection:

3/4" NPT on the right hand rear of the appliance.

The pressure regulator (supplied) is to be connected by the installer.

Gas Pressure:

| | |
|----------|-------------|
| 5" W.C. | Natural Gas |
| 10" W.C. | Propane |

Clearances:

| | Combustible | Non-Combustible |
|-------|-------------|-----------------|
| Rear | 4" | 0" |
| Sides | 15" | 0" |

Specify type of gas and altitude, if over 2,000 feet, when ordering.

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.

3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com